
ON BOARD POWER SUPPLY

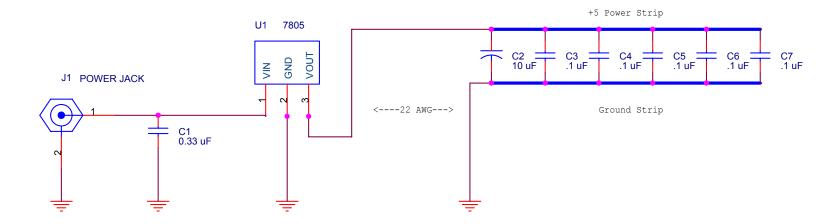

NOTES:

- 1. A heat sink should be used with regulator.
- 2. Heat sink compound needs to be applied between heat sink and regulator.
- 3. A 6-32 nut will be used as a spacer between heat sink and the vector board.

Title

Vector Board Power Supply

Size Document Number Rev B

Date: Wednesday, March 15, 2006 Sheet 1 of 1