HEXADECIMAL AND DECIMAL CONVERSION

HEXADECIMAL COLUMNS											
6		5		4		3		2		1	
HEX	DEC	HEX	DEC	HEX	DEC	HEX	DEC	HEX	DEC	HEX	DEC
0	0	0	0	0	0	0	0	0	0	0	0
1	1,048,576	1	65,536	1	4,096	1	256	1	16	1	1
2	2,097,152	2	131,072	2	8,192	2	512	2	32	2	2
3	3,145,728	3	196,608	3	12,288	3	768	3	48	3	3
4	4,194,304	4	262,144	4	16,384	4	1,024	4	64	4	4
5	5,242,880	5	327,680	5	20,480	5	1,280	5	80	5	5
6	6,291,456	6	393,216	6	24,576	6	1,536	6	96	6	6
7	7,340,032	7	458,752	7	28,672	7	1,792	7	112	7	7
8	8,388,608	8	524,288	8	32,768	8	2,048	8	128	8	8
9	9,437,184	9	589,824	9	36,864	9	2,304	9	144	9	9
A	10,485,760	A	655,360	A	40,960	A	2,560	A	160	A	10
B	11,534,336	B	720,896	B	45,056	B	2,816	B	176	B	11
C	12,582,912	C	786,432	C	49,152	C	3,072	C	192	C	12
D	13,631,488	D	851,968	D	53,248	D	3,328	D	208	D	13
E	14,680,064	E	917,504	E	57,344	E	3,584	E	224	E	14
F	15,728,640	F	983,040	F	61,440	F	3,840	F	240	F	15
7654		3210		7654		3210		7654		3210	
Byte				Byte				Byte			

POWERS OF 2

2^n	n
256	8
512	9
1 024	10
2 048	11
4 096	12
8 192	13
16 384	14
32 768	15
65 536	16
131 072	17
262 144	18
524 288	19
1 048 576	20
2 097 152	21
4 194 304	22
8 388 608	23
16 777 216	24

$2^0 = 16^0$
$2^4 = 16^1$
$2^8 = 16^2$
$2^{12} = 16^3$
$2^{16} = 16^4$
$2^{20} = 16^5$
$2^{24} = 16^6$
$2^{28} = 16^7$
$2^{32} = 16^8$
$2^{36} = 16^9$
$2^{40} = 16^{10}$
$2^{44} = 16^{11}$
$2^{48} = 16^{12}$
$2^{52} = 16^{13}$
$2^{56} = 16^{14}$
$2^{60} = 16^{15}$

POWERS OF 16

16^n	n
1	0
16	1
256	2
4 096	3
65 536	4
1 048 576	5
16 777 216	6
268 435 456	7
4 294 967 296	8
68 719 476 736	9
1 099 511 627 776	10
17 592 186 044 416	11
281 474 976 710 656	12
4 503 599 627 370 496	13
72 057 594 037 927 936	14
1 152 921 504 606 846 976	15

BACKWARD RELATIVE BRANCH TABLE

MSD \ LSD	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
8	128	127	126	125	124	123	122	121	120	119	118	117	116	115	114	113
9	112	111	110	109	108	107	106	105	104	103	102	101	100	99	98	97
A	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82	81
B	80	79	78	77	76	75	74	73	72	71	70	69	68	67	66	65
C	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	49
D	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33
E	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17
F	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1

FORWARD RELATIVE BRANCH TABLE

MSD \ LSD	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
2	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47
3	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
4	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79
5	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95
6	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111
7	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127

ASCII CHARACTER SET (7-BIT CODE)

LSD \ MSD		0 000	1 001	2 010	3 011	4 100	5 101	6 110	7 111
0	0000	NUL	DLE	SP	0	@	P		p
1	0001	SOH	DC1	!	1	A	Q	a	q
2	0010	STX	DC2	”	2	B	R	b	r
3	0011	ETX	DC3	#	3	C	S	c	s
4	0100	EOT	DC4	$	4	D	T	d	t
5	0101	ENQ	NAK	%	5	E	U	e	u
6	0110	ACK	SYN	&	6	F	V	f	v
7	0111	BEL	ETB	’	7	G	W	g	w
8	1000	BS	CAN	(	8	H	X	h	x
9	1001	HT	EM	)	9	I	Y	i	y
A	1010	LF	SUB	*	:	J	Z	j	z
B	1011	VT	ESC	+	;	K	[	k	{
C	1100	FF	FS	,	<	L	\	l	|
D	1101	CR	GS	—	=	M	]	m	}
E	1110	SO	RS	•	>	N	↑	n	~
F	1111	SI	VS	/	?	O	←	o	DEL

NUL — Null
SOH — Start of Heading
STX — Start of Text
ETX — End of Text
EOT — End of Transmission
ENQ — Enquiry
ACK — Acknowledge
BEL — Bell
BS — Backspace
HT — Horizontal Tabulation
LF — Line Feed
VT — Vertical Tabulation
FF — Form Feed
CR — Carriage Return
SO — Shift Out
SI — Shift In

DLE — Data Link Escape
DC — Device Control
NAK — Negative Acknowledge
SYN — Synchronous Idle
ETB — End of Transmission Block
CAN — Cancel
EM — End of Medium
SUB — Substitute
ESC — Escape
FS — File Separator
GS — Group Separator
RS — Record Separator
US — Unit Separator
SP — Space (Blank)
DEL — Delete

PUNCHED TAPE FORMAT (ASCII)

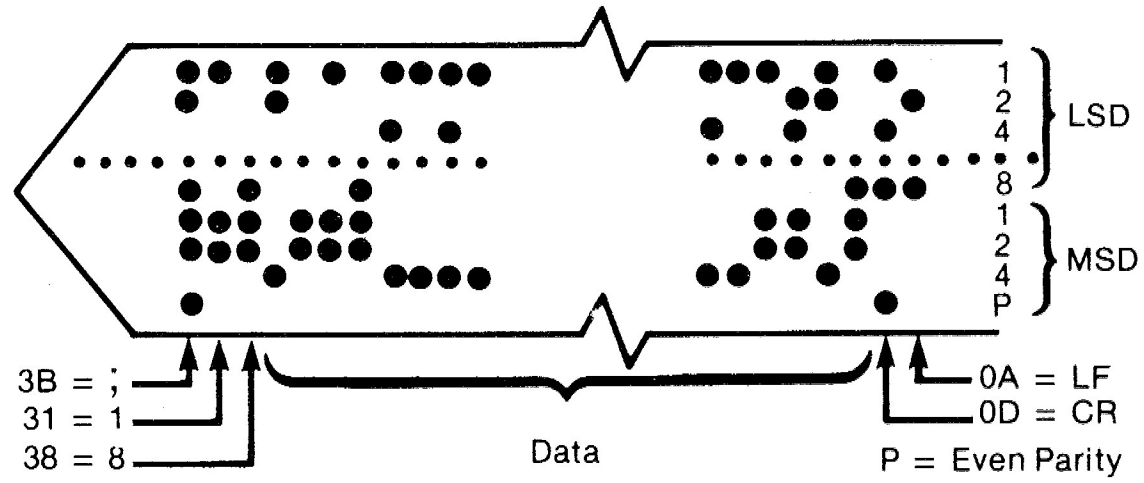

OBJECT CODE RECORD FORMAT (ASCII)

Data Record: $;N_1N_0A_3A_2A_1A_0\overbrace{D_1D_0}^{1}\overbrace{D_1D_0}^{2}\ldots\overbrace{D_1D_0}^{n}X_3X_2X_1X_0$CR LF

Last Record: $;00C_3C_2C_1C_0X_3X_2X_1X_0$

where:

Two hex digits (MSD & LSD) = 1 ASCII character

; = Start of record (ASCII '3B')

N_1N_0 = No. of data bytes in record (hex.) 18_{16} max.
= 00 for last record

$A_3A_2A_1A_0$ = Starting address (hex)

D_1D_0 = Two hexadecimal digits = One 8-bit data byte

$X_3X_2X_1X_0$ = Record checksum (hex.) Hex sum of all characters in the record except ; and checksum, truncated to 16 bits (four hex digits)

$C_3C_2C_1C_0$ = Total number of records (hex)

CR = Carriage Return (ASCII '0D')

LF = Line Feed (ASCII '0A')